
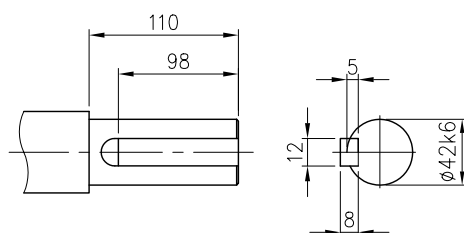
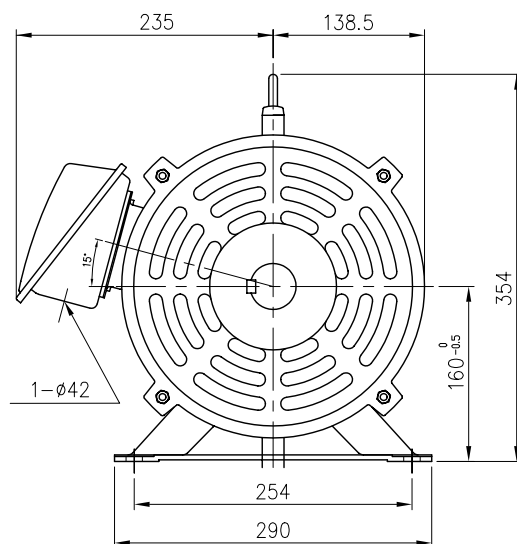


OUTLINE DIMENSION

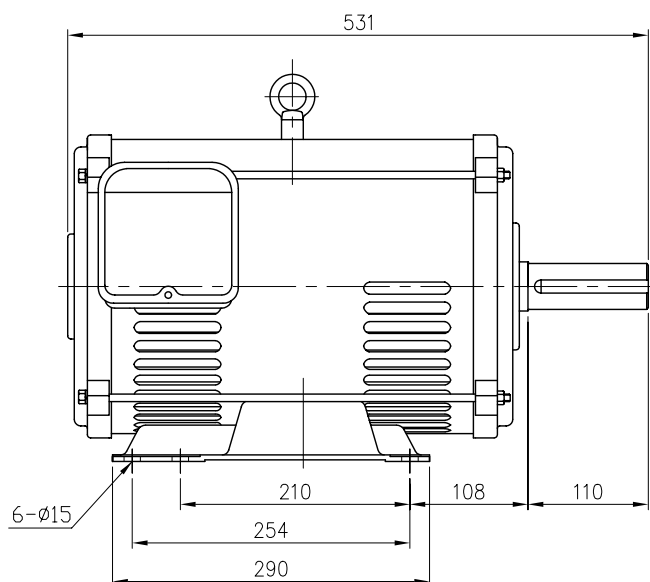

SHAFT EXTENSION

<NOTE>

1. TYPE : ODP(DPEN DRIP PROOF)

FOOT MOUNTED TYPE

2. THE TOLERANCE FOR THE KEY DIMENSIONS IS IN ACCORDANCE WITH KS B 1311-84

3. THE TERMINAL BOX MAY BE ROTATED STEPS OF 90°

4. STEEL FRAME AND CAST IRON END BRACKETS.
5. STEEL TERMINAL BOX.

FRAME NO.	OUTPUT (KW)				INS. CLASS	PRO-TEC-TION	RA-TING	BEARING NO.						APPROX. WEIGHT (Kg)		
								2 P		4 P		6P / 8P				
	2P	4P	6P	8P				DRIVE	OPP.D.	DRIVE	OPP.D.	DRIVE	OPP.D.	2P	4P	6P/8P
160M	—	11/15	—	—	F	IP22	CONT.	—	—	6309ZZ	6307ZZ	—	—	—	75/85	—

UNIT	mm	SCALE	N S	PROJECT'N	3rd Angle	TITLE	OUTLINE
DESIGNED		CHECKED		APPROVED			
2006.04.19 B.K.KIM		2006.04.19 J.S.PARK		2006.04.19 H.T.KIM		SUBJECT	160M, B3
Otis Elevator Korea						DWG. NO.	KMQ-15HK2L