


THREE PHASE INDUCTION MOTOR


TYPE ⇨ TOTALLY ENCLOSED FAN COOLED

OTHER SPECIAL FEATURES


OUTLINE DIMENSIONS




SECTION C-C




SECTION B-B





SECTION A-A



DETAIL "D"

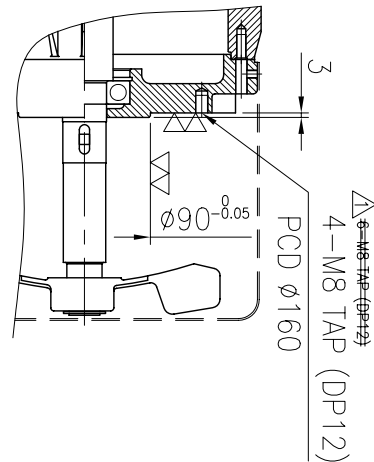

DETAIL E/B(R)

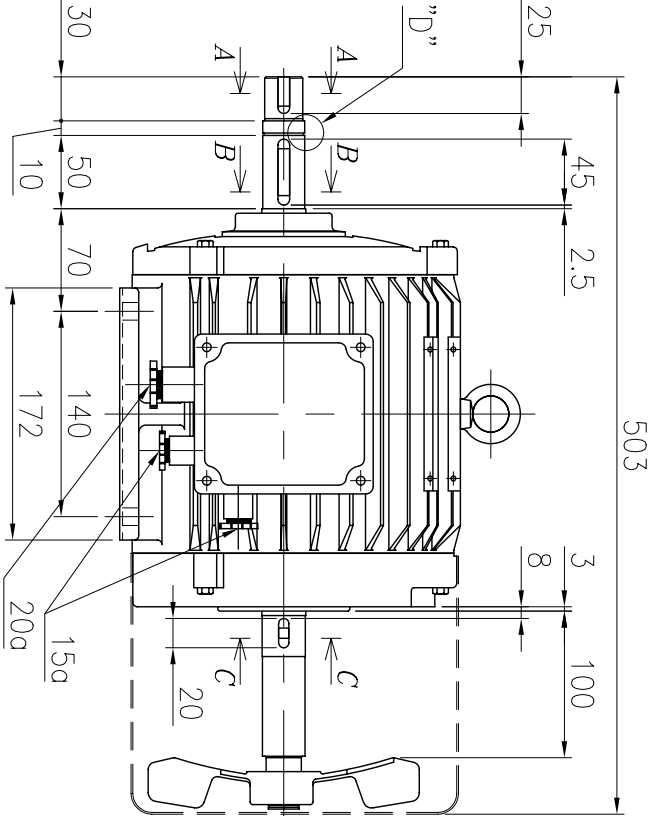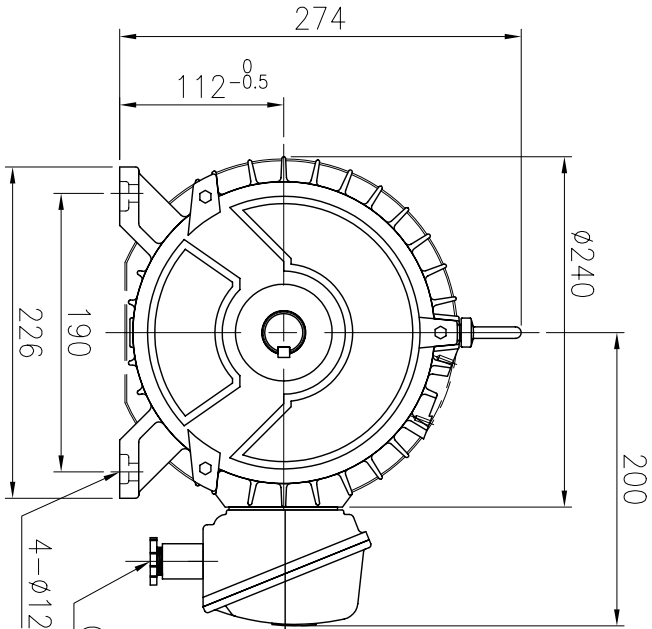

GENERAL SPECIFICATIONS

FRAME NO.	HP	POLE	VOLTS	HZ	INS. CLASS	SERVICE FACTOR	RATING	BEARINGS		APPROX WEIGHT	PROTECTION	MODEL NAME
								DRIVE	OPP.DRIVE			
A	3	6	440	60	F	1.0	CONT.	6206ZZ	6206ZZ	50KG	IP55	IO3HV8YUMH
B												
C												

<참 고>

1. SHAFT 끝단 흔들림은 0.05TIR 이하일것.
2. MOTOR의 진동은 V30 이하일것.
3. E/B(R) : 명출인 부착
4. CABLE GLAND 부착 (3EA)
5. 밀착 SPRING : E/B(F)측 부착
6. 하도 상태, 영문영판 부착 출하
7. 단차대 부착(S/P)
8. 주물 단차 BOX부착
9. E/B(F) : OIL-SEAL 부착
10. 모든 접부 역상 가스켓 부착
11. SPACE HEATER 부착

DETAIL E/B(R)부분

6-M8 =>4-M8 TAP 변경
D05730 2005.10.25 한원규

DRAWING NO. 4681KHCJE7

PREPARED CHECKED APPROVED

2005.08.08 2005.08.08 2005.08.08
H.G.HAN H.J.KIM H.T.KIM

OTIS